

PROPANE PATIO HEATER

Supplies Needed	1
Requirements	2
Set-Up	3
Operation	4
Clean-Up	5
Trouble Shooting	6
Locations	7

Volume # 2013-A
Document Property of
Diamond Event ©

SUPPLIES

- Patio Heater
- Reflector Top
- 5 Gal. Propane Tank (Typically provides 8-10 hours of heat.)
- Propane Fuel
- Optional Black Tuxedo Cover

REQUIREMENTS


- Outdoor Use Only
- 4' from Walls
- 2' from Ceiling

SET-UP

- Level Surface

CLEAN-UP

- When done, turn the control knob to the "OFF" position.
- Turn "Off" the propane tank when done using.
- If windy, place in a safe location away from the wind.

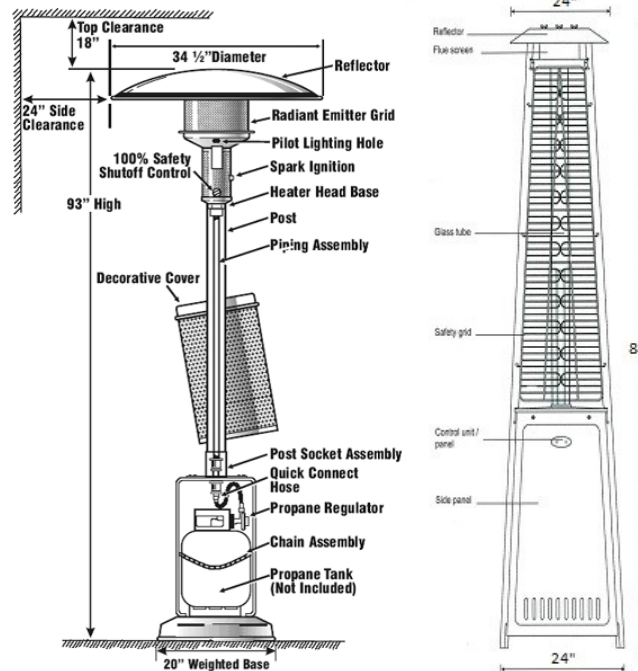

Sample Photo / Actual Patio Heater Style May Vary.

OPERATION INSTRUCTIONS

1. Connect propane tank to regulator.
2. Using your hand, firmly secure the regulator to the propane tank.
3. Push in and rotate control knob to "PILOT" position.
4. Continue to hold/depress control knob for 30-60 seconds.

NOTE: Allow 1.5 minutes to purge air through pilot after connection with a new tank of propane gas.

5. Insert a lit match or lighter through 1/2" lighting hole above the control knob.
6. The pilot light should remain lit.
7. Turn the control knob to the "On" position.

NOTE: Wait 5 minutes after shutting off heater before re-lighting.

TROUBLE SHOOTING

PILOT WON'T LIGHT

- * Air in Gas Line
- * Low Gas Pressure
- * Gas Line Turned "Off"
- * Blockage in Gas Line

PILOT WON'T STAY LIT

- * Bad Thermocouple
- * Corrosion of thermo couple contact
- * Bad Valve
- * Wind Exceeding 10 mph

BURNER WON'T LIGHT

- * Low Gas Pressure
- * Blockage in Orifice
- * Manual Valve not in the "On" position.

If you have any problems or concerns, please call your local Diamond Event Party Location.

LOCATIONS

SALT LAKE CITY
4518 South 500 West
801-262-2080